


Acclaim Console Series

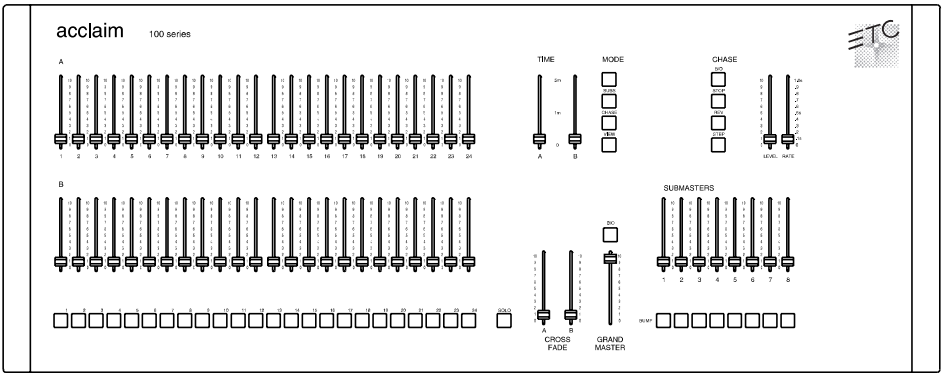

AC124

GENERAL INFORMATION

A simple low-cost two-scene preset console with DMX512 output – the ideal solution for small system venues and the ideal companion for portable dimmer packs.

- APPLICATIONS
- Elementary schools
Small community theatre groups
Small road shows or rental tours
Limited dimmer venues
- PERFORMANCE FEATURES
- DMX512 output through 12, 24, 36, or 48 channels
Two-scene cross faders with fade time sliders
12, 24, 36, or 48 channel sliders
Eight submaster sliders
Grandmaster slider and Blackout button
Simple chase with manual control

ORDERING INFORMATION

Acclaim	
Model#	Description
AC112	Acclaim 12-channel console
AC124	Acclaim 24-channel console
AC136	Acclaim 36-channel console
AC148	Acclaim 48-channel console



Acclaim Console Series

SPECIFICATIONS

SYSTEM CAPACITY	12, 24, 36, or 48 DMX512 dimmers
	12, 24, 36, or 48 channel two-scene operation
PLAYBACK CONTROLS	Split handle cross fader for dipless crossfades, lead/lag and pile-on fades
	Single timed/manual fader pair
OPERATING MODES	Two-scene playback
	Single row of channel buttons with LEDs switchable from Bump to Solo mode
	Simple chase function
	Eight submasters with [Bump] and [Solo] buttons
	Grandmaster fader
	Blackout button
	[View] displays the chase on the channel button LEDs
	[Submaster] allows the user to program the submasters
	[Chase] allows the user to program a series of steps
	Each step contains one channel
	Level slider controls overall intensity of the chase

Rate slider adjusts the amount of time between each step of the chase. (variable from .1 second to 1 second)

[Blackout] button blacks out the chase output

[Reverse] button controls the direction of the chase

[Step] button steps through each step individually


[Stop] button stops the chase at any point

ELECTRICAL Power switch
90 - 240 VAC, 50 or 60Hz, auto-sensing

PHYSICAL UL , cUL Listed
Steel construction with FR-ABS end caps
Fine-texture, scratch-resistant grey powder coat with black and red silk-screened graphics
Adjustable feet provide an angled work surface for convenient operation

PHYSICAL

(AC124 shown)

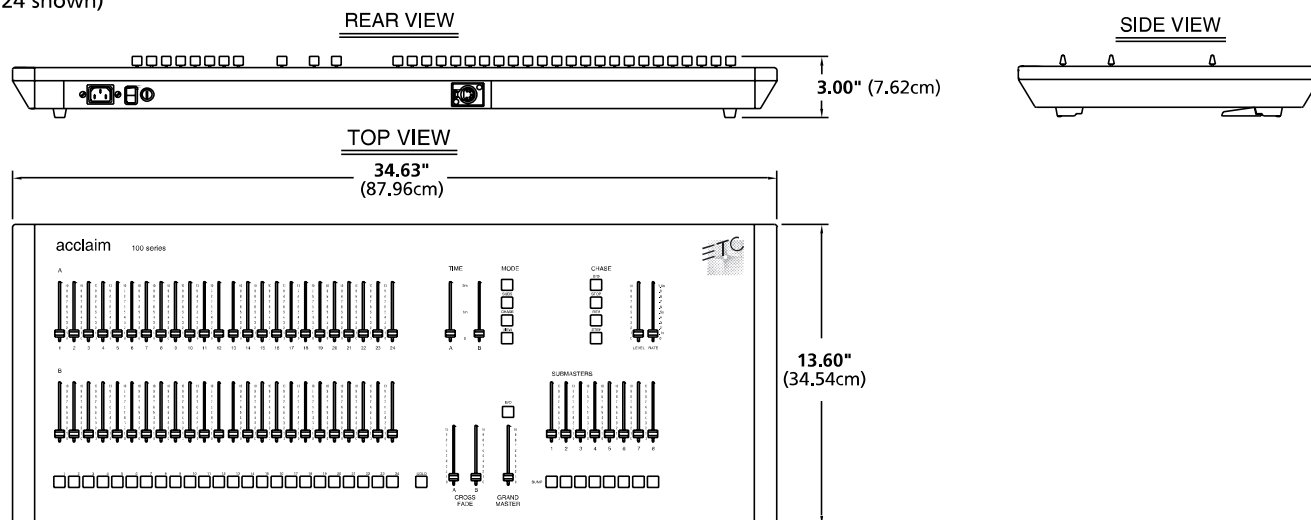

DIMENSIONS

Acclaim Dimensions

Model	Height		Width		Depth	
	inches	cm	inches	cm	inches	cm
AC112	3	7.62	27.13	68.58	13.60	34.54
AC124	3	7.62	34.63	87.96	13.60	34.54
AC136	3	7.62	42.13	107.95	13.60	34.54
AC148	3	7.62	49.88	127	13.60	34.54

WEIGHTS

Acclaim Weights

Model	Weight		Shipping Weight	
	lbs	kgs	lbs	kgs
AC112	22	9.98	24	10.89
AC124	23	10.43	25	11.34
AC136	25	11.34	27	13.61
AC148	33	14.97	35	15.88



Americas ■ 3030 Laura Lane, P.O. Box 620979, Middleton, WI 53562-0979 USA ■ Tel: +1 608 831 4116 ■ Fax: +1 608 836 1736 ■ Toll free: 800 688 4116 ■ Toll free fax: 800 555 8912
Europe ■ Unit 5, Victoria Industrial Estate, Victoria Road, London W3 6UU, UK ■ Tel: +44 (0)20 8896 1000 ■ Fax: +44 (0)20 8896 2000
Asia ■ Room 605-606, Tower III Enterprise Square, 9 Sheung Yuet Road, Kowloon Bay, Kowloon, Hong Kong ■ Tel: +852 2799 1220 ■ Fax: +852 2799 9325
Web: www.etcconnect.com ■ **Email:** (US) mail@etcconnect.com ■ (UK) mail@etcconnect.com ■ (Asia) mail@etcconnect.com

Copyright © 2003 ETC. All Rights Reserved. All product information and specifications subject to change. 1055L1002 Rev. B Printed in USA 03/03